

LED Multi-Angle Surface

Ideal for demanding applications, Albeo's LED Multi-Angle Surface provides an energy efficient, no maintenance alternative to traditional fluorescent high abuse fixtures. Achieve 3 to 5 times longer life with Albeo's patent-pending TEMPR™ Technology. Heavy duty, instant start time, and no hazardous materials.

Applications

Cells, Catwalks, Corridors, Dayrooms and Sally Ports

Construction

Heavy-gauge steel housing, thick "unbreakable" polycarbonate lens, stainless steel tamperproof fasteners, and powder coated finish.

Specifications and Features

110 or 277 VAC input. Transformer included.




Lens Per specification (call for options).

High efficacy power white-LEDs

Wet location construction available

Equivalent Light level: 3 F32T8 fluorescent bulbs.

Part Number	
Type	Comment

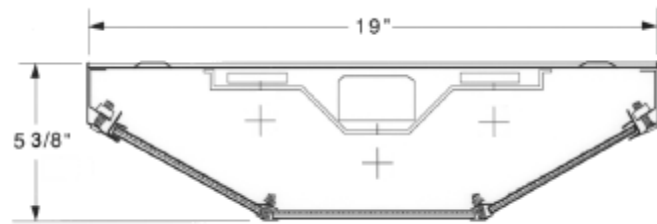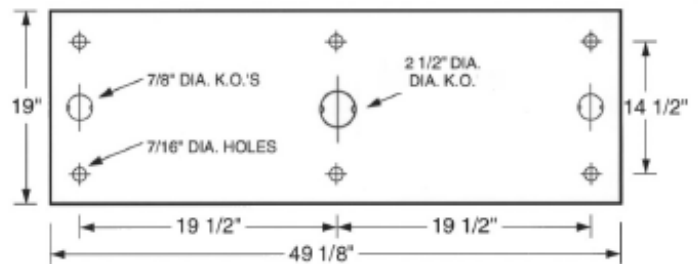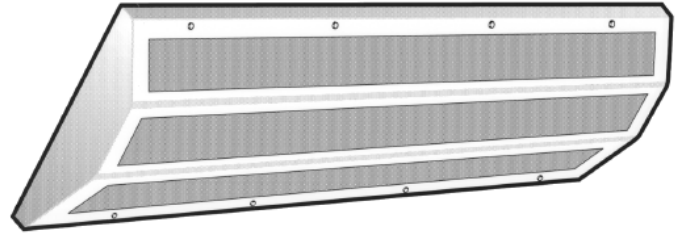

Ordering Information

Not all combinations available.

Series	Size	# of LEDs	Type of LED	Housing type	Inner Lens	Outer Lens	Power Type	Input Voltage	Options
SL04	02	90	1	2	0	2	1	277	00
	01 2' x 19"	30 LEDs	1 1 Watt 5000K	1 12G	0 none	1 .187" PC	1 Torroid	012	1 Allen Head
	02 4' x 19"	45 LEDs	2 1 Watt 4000K	2 14G	1 .125" PC	2 .250" PC	2 Electronic	024	2 Fuse & Holder
		60 LEDs		3 16G	2 .156" PC	3 .375" PC	3 Magnetic	120	
		90 LEDs		4 18G	3 .187" PC	Others Available		277	
		120 LEDs		Steel	Others Available				
		135 LEDs							

