

4 ft Dual GarageLED

Albeo's GarageLED linear fixture provides an energy efficient, no maintenance alternative to traditional fluorescent strip lights. Ideal for covered garage applications, Albeo's patent-pending TEMPR™ technology allows the LEDs to run cooler than fluorescent and last 3 to 5 times longer with no hazardous waste. One LED bar provides light comparable to a two lamp fluorescent fixture at 1/3 less power.

Robust and Innovative Construction

Heavy Duty extruded housing and Albeo's TEMPR™ thermal management technology transfers heat from the LED, reducing junction temperature for more light and longer life.

Superior Performance

High performance LEDs offer superior efficacy and visual acuity with broad spectrum, quality colors. Instant start time. No flicker or buzzing. -30 to +45 C operating temperature.

Optical Advantage


Directional LEDs put light where it's needed. Standard, narrow, or aisle lens available.

Electrical System

120V, 277V, or Universal input. Variety of transformers available. Luminaire disconnect optional.

Easy Mounting

Standard chain/cable or rod suspended.

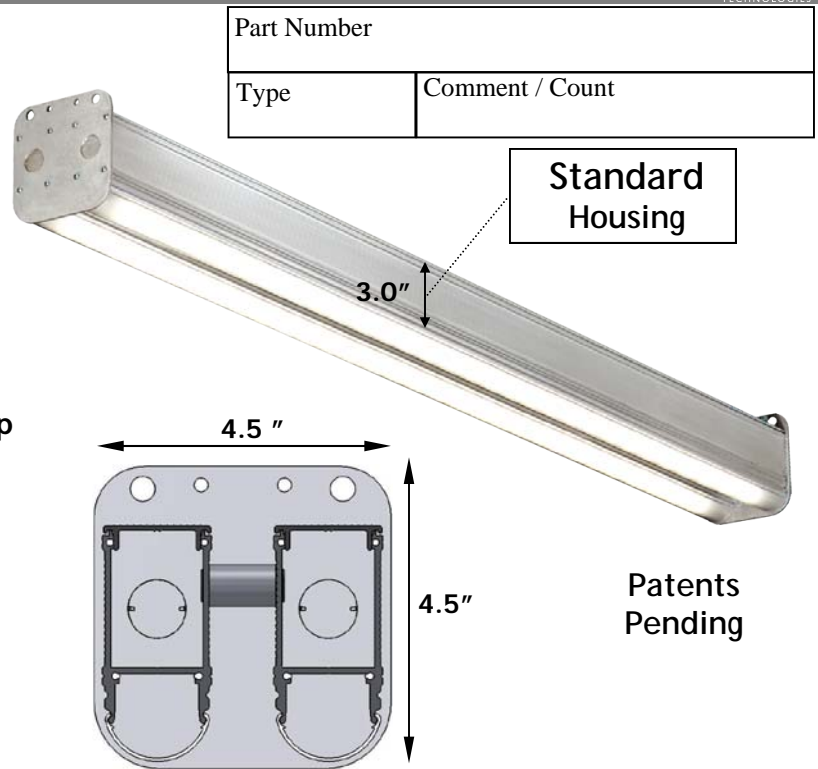

Patents Pending

Controls

Optimize energy savings with occupancy/motion sensing and dimming options.

Lifetime

Independently certified in-situ temperature testing in conjunction with LM-80 tested LEDs provides L70 lifetime up to 100,000 hours.

Warranty

5 years, subject to Albeo's standard terms and conditions.

Ordering Information

Not all combinations available.

Product Platform	Model	# of LED bars	Length	LED CCT	LED Pitch	Input Voltage	Optics	Mounting	Intelligent Controls	Revision
LS		2	4				W			
LS GarageLED Linear Suspended Light Fixture	B High Brightness V High Value	1 1 bar 2 2 bar	4 4 ft 8 8 ft	4 5000°K 5 4200°K 6 3500°K	0 1 inch (Bright) 1 1.5 inch (Value)	1 120 V 2 277 V U 120-277 Universal	W Wide Optic	C Chain R Rod N Cont. Run	0 None M Motion V 0-10V dimming L Line voltage dimming (120V only)	Revision used to further define product configuration. See chart on page 2.

Made in America



LM-79
Tested

rev. 8.5.10

4 ft Dual GarageLED

Optical and Electrical Specifications

Part Number	
Type	Comment / Count


All options not listed. Please contact sales for technical specs of other part numbers.

Type	Part Number	Transformer	Dimming	Temp	CRI	# LEDs	Lumens	Lm/W	Watts	UL
Value	LS-V244-1UWxx-10	Power Supply	0-10V only	5000 K	70	60	4285	74	58	yes
	LS-V245-1UWxx-10	Power Supply	0-10V only	4000 K	85	60	3540	61	58	yes
	LS-V244-1UWxx-11	Power Supply	0-10V only	5000 K	70	60	5000	69	72	yes
	LS-V245-1UWxx-11	Power Supply	0-10V only	4000 K	85	60	4130	57	72	yes
	LS-V244-11WxL-12	Electronic	yes	5000 K	70	60	4285	74	58	yes
	LS-V245-11WxL-12	Electronic	yes	4000 K	85	60	3540	61	58	yes
	LS-V244-11WxL-13	Electronic	yes	5000 K	70	60	5000	69	72	yes
	LS-V245-11WxL-13	Electronic	yes	4000 K	85	60	4130	57	72	yes
	LS-V244-1xWxx-14	Magnetic	0-10V only	5000 K	70	60	4285	74	58	no
	LS-V245-1xWxx-14	Magnetic	0-10V only	4000 K	85	60	3540	61	58	no
Bright	LS-V244-1xWxx-15	Magnetic	0-10V only	5000 K	70	60	5000	69	72	no
	LS-V245-1xWxx-15	Magnetic	0-10V only	4000 K	85	60	4130	57	72	no
	LS-B244-0UWxx-10	Power Supply	0-10V only	5000 K	70	90	6020	76	80	yes
	LS-B245-0UWxx-10	Power Supply	0-10V only	4000 K	85	90	4975	62	80	yes
Bright	LS-B244-01WxL-12	Electronic	yes	5000 K	70	90	6020	76	80	yes
	LS-B245-01WxL-12	Electronic	yes	4000 K	85	90	4975	62	80	yes

Power and light output can vary +/-10%

Photometry

Tested to LM-79 standards. IES files available.

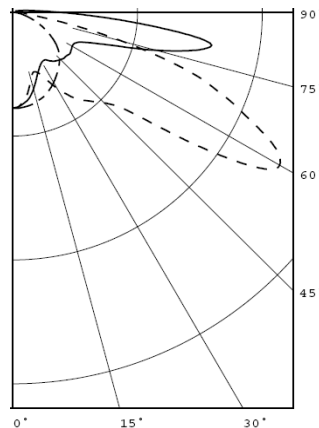

Wide Distribution
"Bat Wing"

The Albeo LED Linear Suspended fixture must be installed by a qualified electrician. It is the responsibility of the contractor, installer, purchaser, owner, and user to install, maintain, and operate the fixture in such a manner as to comply with all state and local laws, ordinances, regulations, and the American National Standards Institute Safety Code.

US Patents Pending

Specification subject to change without notice. See website for latest version.

Made in America



LM-79

rev. 8.5.10